

NPR Stripped Chassis

Features	Benefits
Engine	
Turbocharged, intercooled	Increased horsepower, lower emissions
Glowplugs	Quick cold weather starting
Transmission	
Synchromesh	Easy shifting, long life, low maintenance
Electromatic® A/T (Optional)	Easier drivability, low maintenance
Rear Axle	
Banjo-type rear axle	Distributes weight on axle housing—not drive components, improved durability
Oil lubricated tapered, roller-type wheel bearings	Promotes longer bearing life
Front Axle	
Reverse-Elliot	More than sufficient strength to haul the load
I-Beam front axle	Maintains proper alignment for improved tire life
King pins	Rotate in needle bearings, not bushings, for long life and ease of turning
Suspension	
Semi-elliptical leaf springs (front and rear)	Added strength for handling loads and improved ride characteristics
Stabilizer bars (front and rear)	Added stability for improved handling characteristics
Brake System	
Exhaust brake	Prolongs life of service brakes, operates automatically, minimizes driver effort

WARRANTY COVERAGE AT A GLANCE



Vehicle Coverage	Warranty Limitations*		Amount of Dealer's Normal Charge Paid by Owner
	Time	Mileage	Parts and Labor
Entire Vehicle ¹	0-24 mo.	Unlimited	No Charge
Engine (including all Gear driven accessories)			
• Transmission	0-36 mo.	Unlimited	No Charge
• Crossmembers			
• Drive Axles			
• Flywheel Housing	0-24 mo.	Unlimited	No Charge
• Propeller Shaft			
• Clutch Housing			
• Front Axle I-Beam			
Frame Rails	0-24 mo.	Unlimited	No Charge
	24-60 mo.	Unlimited	50%
Engine Emissions	0-60 mo.	100,000 mi.	No Charge
Corrosion (Rust Through)	0-48 mo.	Unlimited	No Charge
Batteries	1-12 mo.	Unlimited	No Charge

*Time or mileage, whichever occurs first.

This is only a summary of the Isuzu Truck Cab/Chassis Limited Warranty. Complete and current information may be found in the current model year Truck Owner's Warranty Information booklet for the truck. Specifications subject to change without notice.

¹ Except tires; warranty provided by the tire manufacturer. Except A/C refrigerant recharge after 12 months.

NPR Stripped Chassis '92

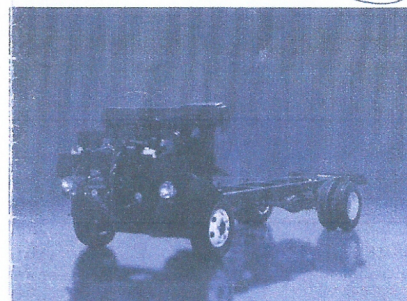

4B02-TC





Works for you.

1992 model

NPR Stripped Chassis SPECIFICATIONS

GVWR	11,050 lb.	13,250 lb.	14,250 lb.
BODY PAYLOAD ALLOWANCE	6,099-6,549 lb.	8,259-8,738 lb.	9,210-9,681 lb.
GAWR	- FRONT 4,700 lb. - REAR 7,950 lb.	2645 lb. / 11050 2190 lb. / 8760	5,360 lb. 9,880 lb.
FRONT AXLE CAPACITY	5,360 lb.	5,360 lb. $\frac{1}{2} \times 2 = 2680$	5,360 lb.
REAR AXLE	- CAPACITY 11,020 lb. - RATIO (STD/AT) 4.10/5.571	11,020 lb. 4.3/5.857	11,020 lb. 4.555/5.847
SUSPENSION, FRONT & REAR	SEMI-ELLIPTICAL LEAF SPRING	SEMI-ELLIPTICAL LEAF SPRING	SEMI-ELLIPTICAL LEAF SPRING
FRAME	- SECTION MODULUS 5.39 in. ³ - RESISTANCE BENDING MOMENT 230,000 lb. ft/in	5.39 in. ³ 230,000 lb. ft/in	5.39 in. ³ 230,000 lb. ft/in
SERVICE BRAKES	- SYSTEM VACUUM/HYDRAULIC - FRONT DISC - REAR DRUM	VACUUM/HYDRAULIC DISC DRUM	VACUUM/HYDRAULIC DRUM DRUM
EXHAUST BRAKE	VACUUM OPERATED	VACUUM OPERATED	VACUUM OPERATED
CLUTCH	- DIAMETER 11.8 in. - TYPE DRY, SINGLE DISC	11.8 in. DRY, SINGLE DISC	11.8 in. DRY, SINGLE DISC
TRANSMISSION	- TYPE 5-SPEED MANUAL SYNCHROMESH (1ST-5TH) ELECTROMATIC® AUTO TRANS - OPTION	5-SPEED MANUAL SYNCHROMESH (1ST-5TH) ELECTROMATIC® AUTO TRANS	5-SPEED MANUAL SYNCHROMESH (1ST-5TH) ELECTROMATIC® AUTO TRANS
ENGINE	- TYPE TURBO/INTERCOOLED DIESEL 4BD2-TC - DISPLACEMENT 3.9 LITER (235.6 C I D) - HORSEPOWER (GROSS) 135 @ 3000 RPM - TORQUE (GROSS) 255 lb/ft @ 1900 RPM	TURBO/INTERCOOLED DIESEL 4BD2-TC 3.9 LITER (235.6 C I D) 135 @ 3000 RPM 255 lb/ft @ 1900 RPM	TURBO/INTERCOOLED DIESEL 4BD2-TC 3.9 LITER (235.6 C I D) 135 @ 3000 RPM 255 lb/ft @ 1900 RPM
ALTERNATOR	70A	70A	70A
BATTERIES	2-750 CCA (MAINTENANCE FREE)	2-750 CCA (MAINTENANCE FREE)	2-750 CCA (MAINTENANCE FREE)
TIRES	215/85R-16E	215/85R-16E	215/85R-16E
STEERING	INTEGRAL HYDRAULIC POWER	INTEGRAL HYDRAULIC POWER	INTEGRAL HYDRAULIC POWER
STEERING COLUMN	TILT & TELESCOPIC	TILT & TELESCOPIC	TILT & TELESCOPIC
BODY LENGTH	13ft. (132WB), 15ft. (150WB), 18ft. (178WB)	13ft. (132WB), 15ft. (150WB), 18ft. (178WB)	13ft. (132WB), 15ft. (150WB), 18ft. (178WB)

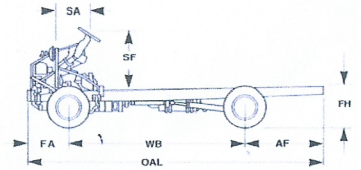

NPR Stripped Chassis DIMENSIONS

GVWR lb	WB in	FA in	AF in	OAL in	FH in	BW in	AW in	CW in	FW in
11,050	132.5	33.9	49.4	215.8	31.5	78.3	65.6	60.0	29.5
11,050	150.0	33.9	49.4	233.3	31.5	78.3	65.6	60.0	29.5
11,050	178.0	33.9	49.4	261.3	31.5	78.3	65.6	60.0	29.5
13,250	132.5	33.9	49.4	215.8	31.5	78.3	65.6	60.0	29.5
13,250	150.0	33.9	49.4	233.3	31.5	78.3	65.6	60.0	29.5
13,250	178.0	33.9	49.4	261.3	31.5	78.3	65.6	60.0	29.5
14,250	132.5	33.9	49.4	215.8	31.5	78.3	65.6	60.0	29.5
14,250	150.0	33.9	49.4	233.3	31.5	78.3	65.6	60.0	29.5
14,250	178.0	33.9	49.4	261.3	31.5	78.3	65.6	60.0	29.5